BETA MAX INC.
HOISTS

BETA MAX MC 2000P MB

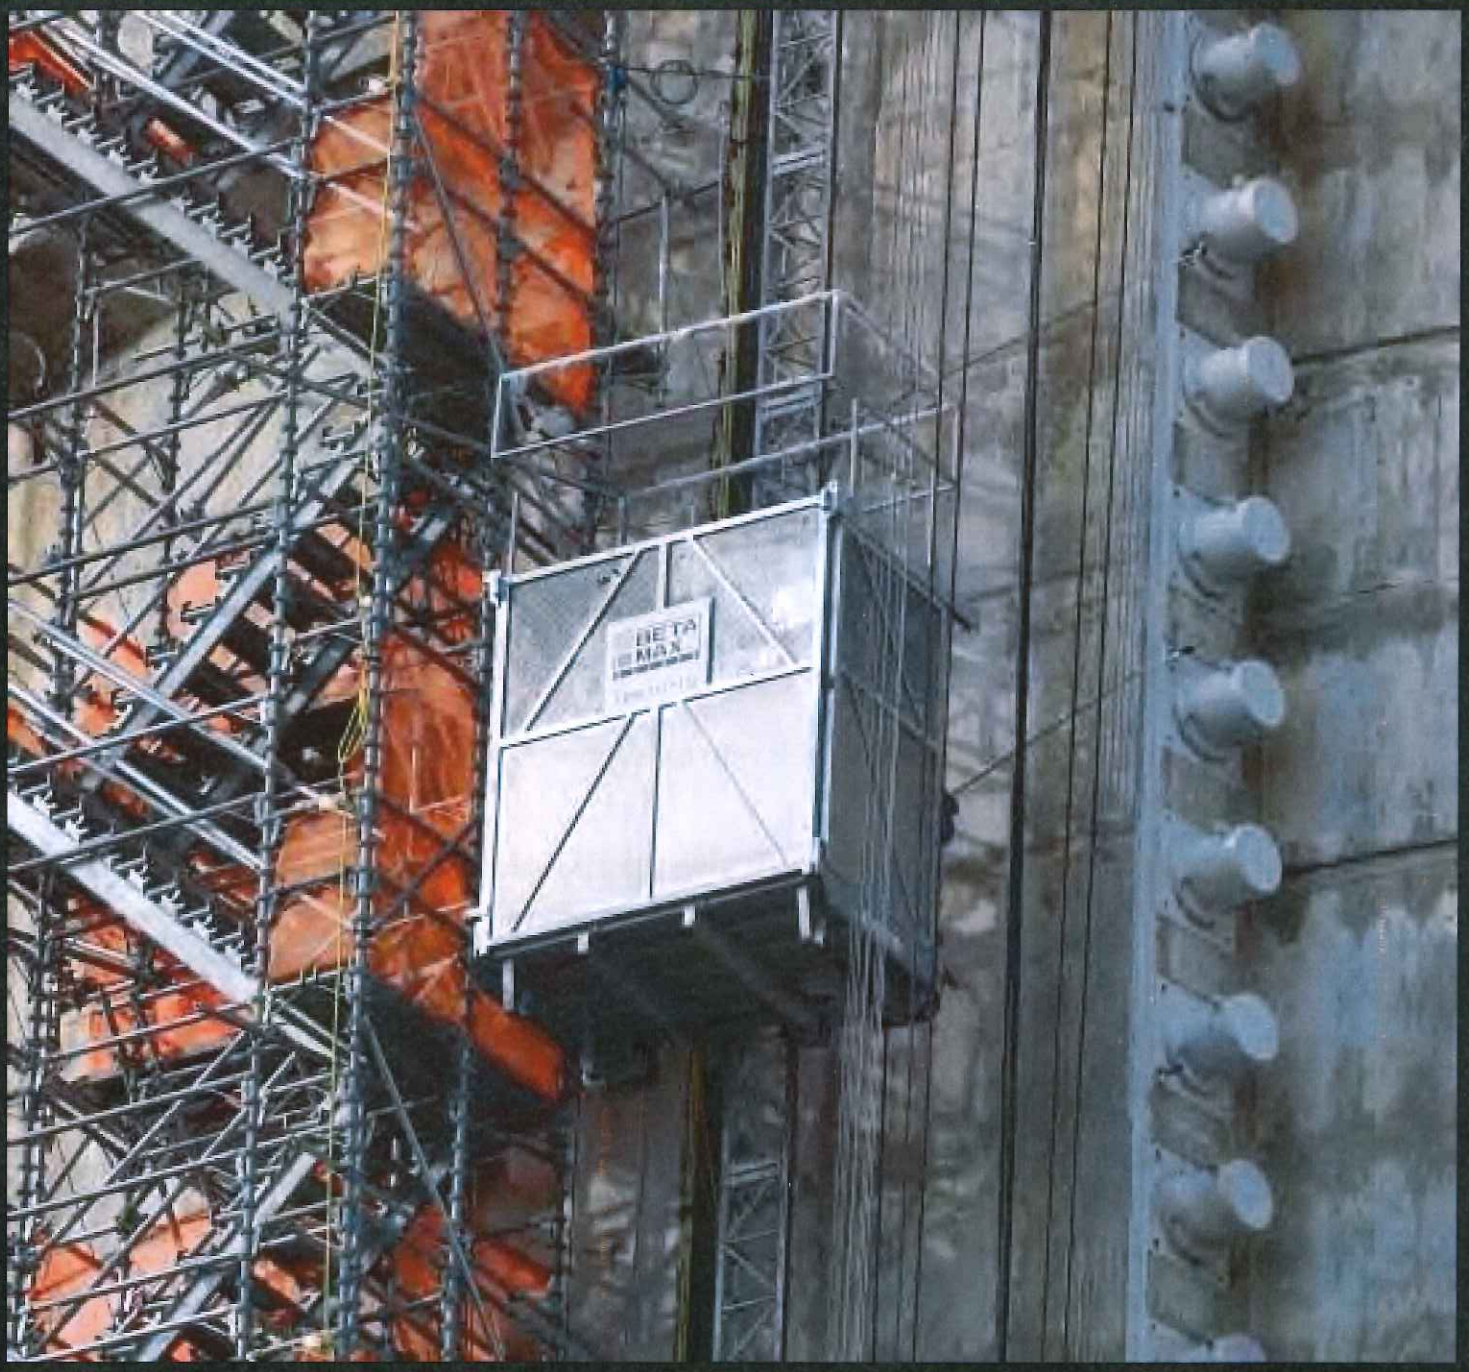

BETA MAX HOIST – MELBOURNE FL - 800-233-5112

BETA MAX HOISTS

MAX CLIMBER 2000PMB

MAN & MATERIAL HOIST

H 500ft W 2000lbs

HOIST FEATURES

- **Small footprint** of 8ft x 8ft fits perfectly in the most rugged and confined spaces
- **Streamline material delivery** to job level with dedicated, enclosed cargo carriage
- Installation efficiency ensured with **self erecting feature** and dedicated one piece base system comes to the job site pre-assembled
- **Fold out installation platform** guarantees faster and easier access when installing wall ties
- **Can attach to scaffolding or anchor directly to the building**
- **Call Box Option** can be installed at each floor landing gate and allows hoist operator to be called to a specific floor
- **Durable aluminum car wall** panels with car support frame and mast sections of hot dip galvanized steel
- **Can be engineered for custom job site application** for temporary or permanent use

INDUSTRIES SERVED

Commercial: Construction, Demolition, Masonry, Restoration
Industrial: Cement plants, Paper mills, Power plants, Petro-chemical plants, Storage silos

SAFETY FEATURES

- **Upper, Lower and Intermediate Floor Stop** switches integrated into system
- Manual brake release lever in case of **power interruption during use**
- **Failsafe brake holds the load securely** when not lifting or lowering loads
- Removable overhead protection **keep workers safe during load and unload**
- **Sensors detect** when basket is in load or unload mode and hoist will not operate
- Fold down loading and unloading ramps **with guard rails to ensure worker safety**

All rack and pinion hoists are ANSI/ASSE A10.5 and OSHA compliant. This information is intended to be informative only, and does not constitute a representation or warranty with regard to Beta Max Hoists or any products or services provided. Prices and information are subject to change. Some or all of the renderings in these materials will vary from the actual hoists.

800-644-6478 | PO Box 2750 Melbourne | FL 32902 | www.BetaMaxHoist.com

MAX CLIMBER 2000MB

MATERIAL HOIST

H 500ft W 2000lbs

HOIST FEATURES

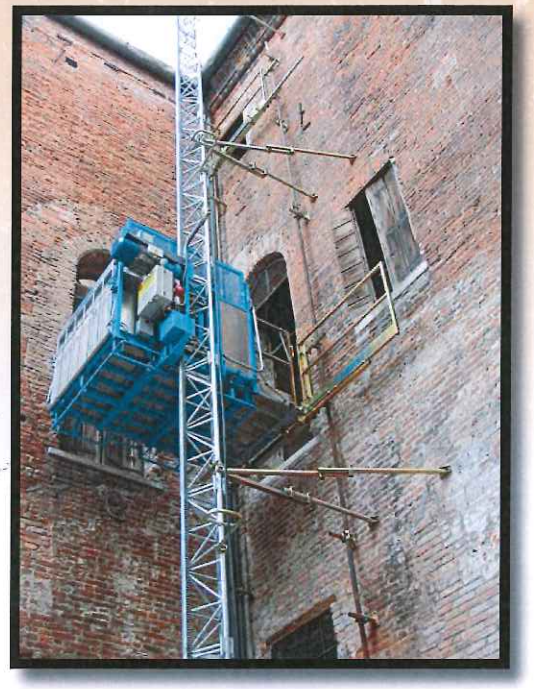

- **Small footprint** fits perfectly in the most rugged and confined spaces
- **Streamline material delivery** to job level with dedicated cargo carriage
- Installation efficiency ensured with **self erecting feature** - NO crane required
- **Three fold down ramps** allow materials to be loaded and unloaded without double and triple handling
- **Can attach to scaffolding or anchor directly to the building**
- **Fold out installation platform** guarantees faster and easier access when installing wall ties
- **Durable aluminum car wall** panels with car support frame and mast sections of hot dip galvanized steel
- **Can be engineered for custom job site application** for temporary or permanent use

INDUSTRIES SERVED

Commercial: Construction, Demolition, Masonry, Restoration
Industrial: Cement plants, Paper mills, Power plants, Petro-chemical plants, Storage silos

SAFETY FEATURES

- **Upper, Lower and Intermediate Floor Stop** switches integrated into system
- Manual brake release lever in case of **power interruption during use**
- **Failsafe brake holds the load securely** when not lifting or lowering loads
- Removable overhead protection **keep workers safe during load and unload**
- **Sensors detect** when basket is in load or unload mode and hoist will not operate
- Fold down loading and unloading ramps **with guard rails to ensure worker safety**

All rack and pinion hoists are ANSI/ASSE A10.5 and OSHA compliant. This information is intended to be informative only, and does not constitute a representation or warranty with regard to Beta Max Hoists or any products or services provided. Prices and information are subject to change. Some or all of the renderings in these materials will vary from the actual hoists.

800-644-6478 | PO Box 2750 Melbourne | FL 32902 | www.BetaMaxHoist.com

MAX CLIMBER 2000MB

MATERIAL HOIST

H 500ft W 2000lbs

SPECIFICATIONS

Set Up	
Lift Capacity	2000 lbs
Lift Speed	80 fpm
Maximum Anchored Height	500'
Anchoring Distance	Every 20 ft
Base System Footprint	112"x 91"
Mast Sections	102lbs per 5 ft section
A/C Power	Standard Controller: 220v, 30amp, 3 Φ Optional Phase Converter: 220v, 60amp, 1 Φ

SYSTEM CONFIGURATION

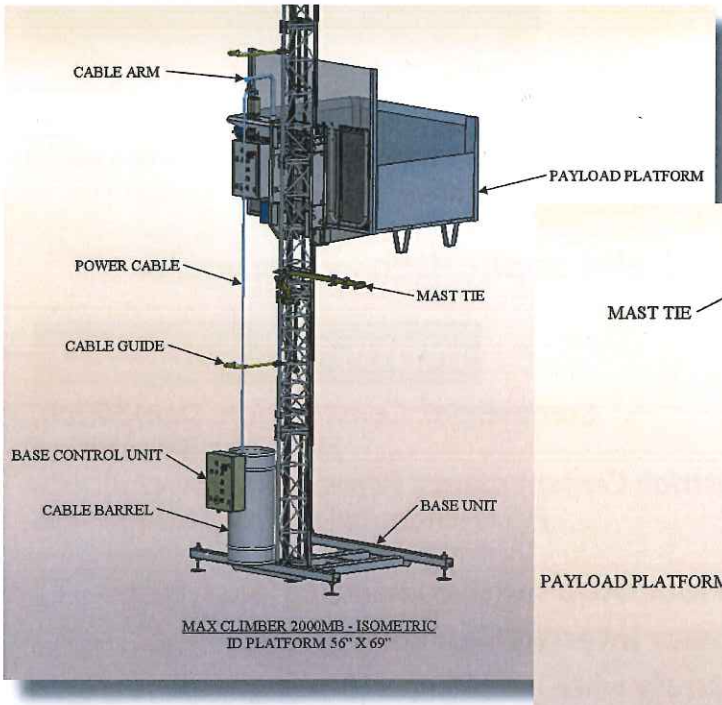

MAX CLIMBER 2000MB - ISOMETRIC
ID PLATFORM 56" X 69"

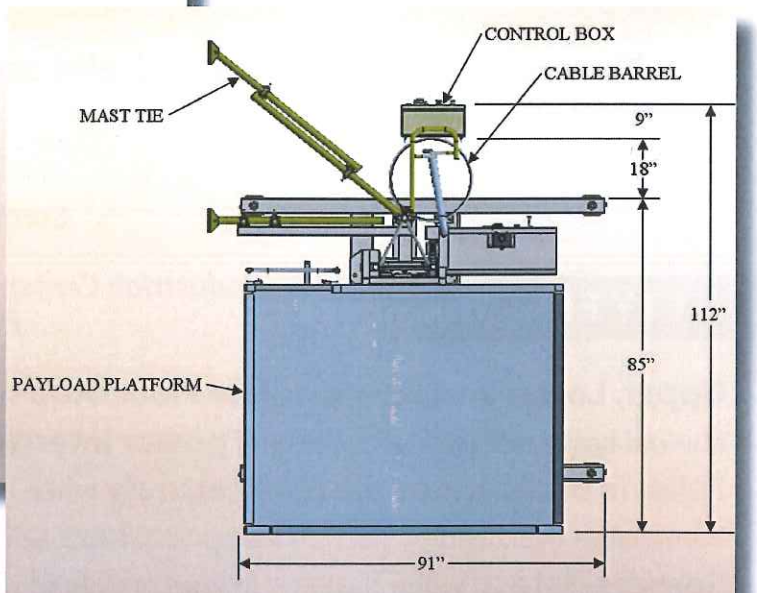

MAX CLIMBER 2000MB - PLAN
ID PLATFORM 56" X 69"

MAX CLIMBER 2000PMB

MAN & MATERIAL HOIST

H 500ft W 2000lbs

SPECIFICATIONS

Set Up	
Lift Capacity	2000 lbs. Personnel: up to 7 passengers
Lift Speed	80 fpm
Maximum Anchored Height	500'
Anchoring Distance	Every 20 ft
Base System Footprint	93" x 95"
Mast Sections	102lbs per 5ft section
A/C Power	Standard Controller: 220v, 30amp, 3 Φ Optional Phase Converter: 220v, 60amp, 1 Φ

SYSTEM CONFIGURATION

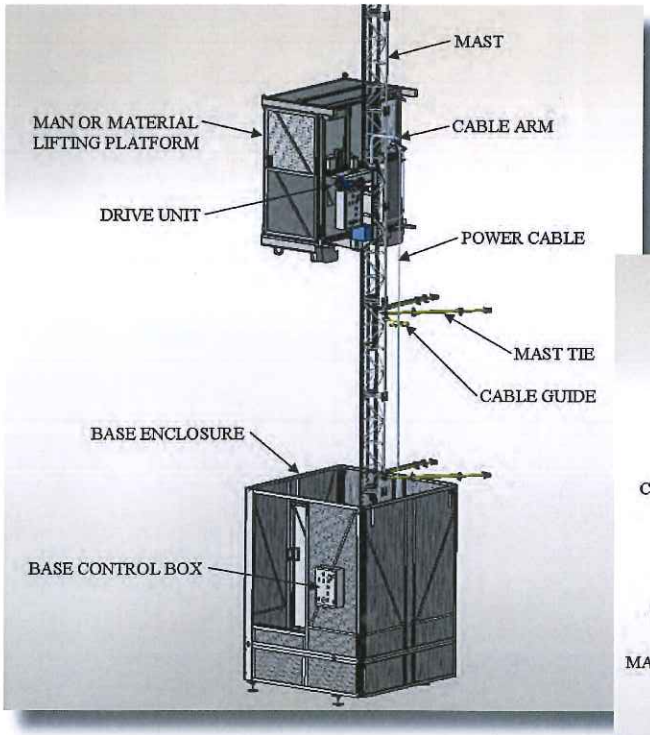

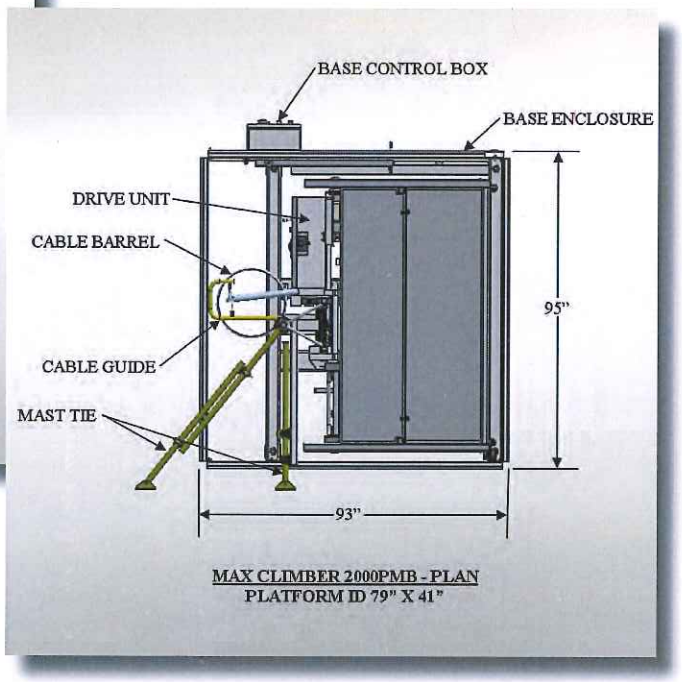

MAX CLIMBER 2000PMB - PLAN
PLATFORM ID 79" X 41"

BETAMAX
BETA MAX