WHAT'S NEW IN

Fall PROTECTION

Miller Fall Prevention and Protection Training

Training is an integral component of a safety-at-height program. Miller Fall Prevention and Protection Training offers a complete line of custom and prescheduled open enrollment training courses with easy online registration. Discount packages available. Training is available in Spanish.

Open enrollment courses are conducted throughout the year in select cities in North America with primary focus on the two-day Competent Person Training program created for facility and site supervisors who must serve as the competent person as required by OSHA 1926.32(f), 1926.500 and 1910 standards.

For a complete list of Miller Open Enrollment courses, dates, locations, and online course selection, visit **www.millerfallprotection.com/training**.

New!

Wind Energy Training on our Nacelle Simulator

MILLER® by Honeywell

⚠ **WARNING!** Miller Fall Protection equipment should be used only in conjunction with the manufacturer's instructions. Failure to follow such instructions could result in serious injury or fatality.

Exceeding worker expectations in comfort, fit, ease-of-use, durability, compliance, flexibility and convenience, the new Miller Revolution Harness provides over 11 key product features from 7 unique components.

Ultimate Comfort and Fit

Miller Revolution™ Harness

Enabled Safety Product

- PivotLink™ Connection – Unique rotary design provides greater comfort in bending / mobility
- Integrated Accessory System – Modular attachment design provides additional connection points for belts / tools / accessories
- ErgoArmor™ Back Shield – Semi-flexible back shield minimizes impact from sharp / heavy snap hooks and self-retracting lifelines
- Web Finials – Clip-on design safely organizes webbing after proper adjustment
- Self-Contained Label Pack – Integrated pack encapsulates labels minimizing damage and loss

A variety of user-friendly accessories available, including: cell phone and radio holders; water bottle holder; bolt, nail and tool holders; hammer loops; plier/tool holder and utility pouch. Universal size (L/XL) fits most

SKU	Side D-rings	Chest/Leg Strap	Removable Belt
RDT-QC/UBK	No	Quick-Connect	No
RDT-QC-B/UBK	No	Quick-Connect	Yes
RDT-QC-DP/UBK	Yes	Quick-Connect	No
RDT-QC-BDP/UBK	Yes	Quick-Connect	Yes

RDT-QC/UBK

Miller DuraFlex Python® Ultra Harness

Enabled Safety Product

- Cushioned tubular webbing in the shoulder straps minimize discomfort when required to wear a tool belt; patented DuraFlex® stretchable webbing in the lower torso increases worker mobility with less fatigue
- Quick-connect buckles on the chest and leg straps for easy donning; specially-woven, breathable, comfort-touch back D-ring pad for greater comfort and tangle-free donning
- Universal size (L/XL) fits most

SKU	Side D-rings	Chest/Leg Strap	Special Features
P950QC/UGN	No	Quick-Connect	Comfort-touch back D-ring pad/ Belt loops
P950QC-4/UGN	No	Quick-Connect/ Tongue Buckle	Comfort-touch back D-ring pad/ Belt loops
P950QC-7/UGN	Yes	Quick-Connect	Comfort-touch back D-ring pad/ Belt loops
P950QC-77/UGN	Yes	Quick-Connect	Comfort-touch back D-ring pad/ Belt loops / Removable waist belt

Greater comfort, less fatigue

P950QC/UGN

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

BODY WEAR

Stretchable webbing

E650QC-7/UGN

Miller DuraFlex Ultra™ Harness

Enabled Safety Product

- Designed with patented DuraFlex® stretchable webbing for greater comfort, safety and productivity
- Quick-connect buckles on the chest and leg straps for easy donning; specially-woven, breathable, comfort-touch back D-ring pad for greater comfort and tangle-free donning
- Includes friction buckle shoulder straps and belt loops to accommodate a tool belt
- Universal size (L/XL) fits most

SKU	Side D-rings	Chest/Leg Strap	Special Features
E650QC/UGN	No	Quick-Connect	Comfort-touch back D-ring pad/Belt loops
E650QC-7/UGN	Yes	Quick-Connect	Comfort-touch back D-ring pad/Belt loops
E650QC-77/UGN	Yes	Quick-Connect	Comfort-touch back D-ring pad / Belt loops / Removable waist belt

Wrap-around comfort

P950-4/UGN

Miller DuraFlex Python® Harnesses

Enabled Safety Product

- Feature wrap-around comfort with cushioned tubular webbing in the upper torso that reduces neck irritation and shoulder stress when wearing a tool belt
- DuraFlex® stretchable webbing in lower torso straps move with the body for greater flexibility, mobility and less fatigue
- Includes friction buckle shoulder straps and belt loops to accommodate a tool belt
- Universal size (L/XL) fits most

SKU	Side D-rings	Leg Strap	Chest Strap	Special Features
P950/UGN	No	Mating	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops
P950-4/UGN	No	Tongue	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops
P950-7/UGN	Yes	Mating	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops
P950-58/UGN	Yes	Tongue	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops
P950-77/UGN	Yes	Tongue	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops Removable tool belt /6-in. back pad

Comfort and mobility

E650-7/UGN

Miller DuraFlex® Stretchable Harnesses

Enabled Safety Product

- Features specially-formulated stretch webbing to provide greater comfort, safety and mobility
- Pull-free lanyard rings (2) allow user to attach lanyard when not in use
- Belt loops to accommodate a tool belt
- Universal size (L/XL) fits most

SKU	Side D-rings	Leg Strap	Chest Strap	Special Features
E650/UGN	No	Mating	Mating	Pull-up adjustment / Pull-free lanyard rings / Belt loops
E650-4/UGN	No	Tongue	Mating	Pull-up adjustment / Pull-free lanyard rings / Belt loops
E650-7/UGN	Yes	Mating	Mating	Pull-up adjustment / Pull-free lanyard rings / Belt loops
E650-58/UGN	Yes	Tongue	Mating	Pull-up adjustment / Pull-free lanyard rings / Belt loops
E552/UGN	Yes	Mating	Mating	Pull-free lanyard rings / Front D-ring

BODY WEAR

Miller HP™ (High Performance) Non-Stretch Harnesses

- Lightweight and economical harness for light construction, general industry, painting and maintenance applications
- Comfort-touch back D-ring pad
- Tangle-free donning
- Universal size (L/XL) fits most

Enabled Safety Product

SKU	Side D-rings	Leg Strap	Chest Strap	Special Features
650T/UGK	No	Mating	Mating	Pull-free lanyard rings / Belt loops
650T-4/UGK	No	Tongue	Mating	Pull-free lanyard rings / Belt loops
650T-7/UGK	Yes	Mating	Mating	Pull-free lanyard rings / Belt loops
650T-58/UGK	Yes	Tongue	Mating	Pull-free lanyard rings / Belt loops
552T-4/UGK	Yes	Mating	Mating	Pull-free lanyard rings / Front D-ring

Extended-wear comfort

650T-58/UGK

BODY WEAR – ACCESSORY

Miller Relief Step™ Safety Device

- Alleviates the effects of orthostatic intolerance, also known as suspension trauma
- When used after a fall, provides support and enhances blood circulation until rescue – permitting the ability to move and flex leg muscles
- Small and lightweight; Attaches to any brand full-body harness
- Utilizing two (2) Relief Steps (one for each leg/foot) assures greater comfort until rescue is completed

SKU	Description
9099X/12	Consists of a box of 12 Relief Step Safety Devices
9099/36BULK	36 Relief Step Safety Devices in bulk quantity

Help prevent suspension trauma

CONNECTING DEVICES

Miller Positioning Assembly

SKU	Description
6756RS-Z7	Rebar chain assembly with two locking snap hooks and one locking rebar hook; swivel attachment and length adjuster; ANSI Z359 compliant

Note: Locking Snap Hook – 3/4-in. gate opening; Locking Rebar Hook – 2-1/2-in. gate opening

6756RS-Z7

MILLER by Honeywell

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES

216WLS/6FTYL

Built-in shock absorber

Miller Manyard® Shock-Absorbing Lanyards

- 6 ft. web tubular lanyards with a built-in shock-absorbing inner core that smoothly expands to reduce fall arrest forces
- Heavy duty tubular web outer jacket serves as a back-up lanyard for added safety
- Unique warning flag indicates unit has been involved in a fall and should be removed from service
- Maximum work load 310 lbs

Enabled Safety Product

SKU	Number of Legs	Harness Connection	Anchorage Connection
216WLS/6FTYL	One	Locking snap hook	Locking snap hook
219WRS/6FTYL	One	Locking snap hook	Locking rebar hook
231WRS/6FTYL	Two	Locking snap hook	Locking rebar hooks
232WLS/6FTYL	Two	Locking snap hook	Locking snap hooks

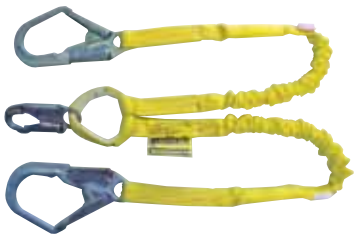

231WRS/6FTYL

Reduces Tripping Hazard

Contracts 6 ft. to 4 ft., Manyard® II lanyards greatly reduce the chances of tripping, snagging, or dragging. Meets all applicable OSHA, ANSI and CSA standards.

216M-Z7/6FTGN

Miller Manyard® II Shock-Absorbing Lanyards

- Contracts 6 ft. to 4 ft., greatly reducing the chances of tripping, snagging or dragging
- Specially-woven shock-absorbing inner core smoothly expands to reduce fall arrest forces
- Heavy-duty tubular web outer jacket serves as a wear indicator and back-up strap to the red inner core for added safety
- Working load of 310 lbs. and features a warning flag to indicate that it has arrested a fall

Enabled Safety Product

SKU	Number of Legs	Harness Connection	Anchorage Connection
216M-Z7/6FTGN	One	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking snap hook
219M-Z7/6FTGN	One	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking rebar hook
231M-Z7/6FTGN	Two	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking rebar hooks

231M-Z7/6FTGN

MILLER® by Honeywell

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

Miller Manyard HP™ Shock-Absorbing Lanyard

Enabled Safety Product

- 6 ft. web tubular lanyards with a built-in shock-absorbing inner core that smoothly expands to reduce fall arrest forces
- Heavy duty tubular web outer jacket serves as a back-up lanyard for added safety
- Unique warning flag indicates unit has been involved in a fall and should be removed from service
- Maximum work load 310 lbs

SKU	Number of Legs	Harness Connection	Anchorage Connection
216TWLS-Z7/6FTGN	One	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking snap hook
219TWLS-Z7/6FTGN	One	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking rebar hook
231TWLS-Z7/6FTGN	Two	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking rebar hooks
232TWLS-Z7/6FTGN	Two	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking snap hooks

Shock-absorbing inner core

216TWLS-Z7/6FTGN

Miller HP™ Lanyard w/SofStop® Shock Absorber

- 6 ft. web lanyard with a SofStop shock absorber pack is designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces
- Includes heavy-duty back up safety strap

SKU	Number of Legs	Harness Connection	Anchorage Connection	Special Features
910TWLS-Z7/6FTGN	One	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking snap hook	Adjustable
913TWLS-Z7/6FTGN	One	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking rebar hook	-------
8798T-Z7/6FTGN	Two	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking snap hooks	-------
8798TR-Z7/6FTGN	Two	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking rebar hooks	-------

Smoothly expands to reduce forces

913TWLS-Z7/6FTGN

Miller StretchStop® Lanyard with SofStop® Shock Absorber

- Contracts 6 ft. to 4 ft., greatly reducing the chances of tripping, snagging or dragging
- SofStop shock absorber pack is designed with a special woven inner core that smoothly expands to reduce fall arrest forces
- Heavy duty tubular web outer jacket serves as a back-up lanyard for added safety

SKU	Number of Legs	Harness Connection	Anchorage Connection
913SS-Z7/6FTGN	One	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking snap hook
913RSS-Z7/6FTGN	One	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking rebar hook
8798SS-Z7/6FTGN	Two	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking snap hooks
8798RSS-Z7/6FTGN	Two	ANSI Z359 compliant locking snap hook	ANSI Z359 compliant locking rebar hooks

Reduces Tripping Hazard

913SS-Z7/6FTGN

MILLER® by Honeywell

CONNECTING DEVICES

BackBiter® lanyard and T-BAK™ PFL offers the ultimate in tie-back safety.

The webbing and snap hooks of regular lanyards are not designed to withstand the rigors of tying back. The innovative BackBiter® Tie-Back Lanyard and T-BAK™ Tie-Back PFL were designed from top to bottom for tie-back use. Meets all applicable OSHA, ANSI, Z359-2007 and CSA standards.

913B/6FTGN

Miller BackBiter® Tie-Back Lanyards

- All-in-one 6 ft. lanyard with SofStop® shock absorber and cross-arm anchorage connector
- Unique Miller 5K® snap hook with 5,000 lbs. gate load capacity from any angle for greater safety
- Heavy-duty webbing with 5-times more abrasion resistance
- SofStop® shock absorber pack is designed with a special woven inner core that smoothly expands to reduce fall arrest forces
- Heavy duty tubular web outer jacket serves as a back-up lanyard for added safety

SKU	Number of Legs	Anchorage Connection	Harness Connection
913B/6FTGN	One	Locking 5K snap hook	Locking snap hook
8798B/6FTGN	Two	Locking 5K snap hook	Locking snap hooks

MFLT-1/7.5FT

MFLTB-1/7.5FT

Miller Turbo T-BAK™ Personal Fall Limiter

- The first and only retractable designed to tie-back anywhere along the lifeline.
- Cost-effective alternative to tie-back, shock-absorbing lanyards
- All-in-one design – 7.5 ft. working capacity and anchorage connector
- Designed for anchoring below a user's harness back D-ring for greater safety
- Integrated shock absorber with load indicator
- Only tie-back retractable that meets ANSI Z359
- The Miller Turbo T-BAK Fall Protection System easily adapts two units for 100% tie-off fall protection

SKU	Description and Unit Connector
Miller Turbo T-BAK™ Personal Fall Limiter	
MFLT-1/7.5FT	Turbo T-BAK without unit connector
MFLT-2/7.5FT	Turbo T-BAK with a 17D-1 steel twist-lock carabiner
MFLT-3/7.5FT	Turbo T-BAK with a 17D-2 lightweight, aluminum twist-lock carabiner
MFLT-4/7.5FT	Turbo T-BAK with a locking snap hook with 3/4-in. gate opening
MFLT-5/7.5FT	Turbo T-BAK with an ANSI Z359-compliant snap hook with 3/4-in. gate opening
Miller Turbo T-BAK™ Fall Protection System	
MFLTB-1/7.5FT	Twin Turbo D-ring Connector with two (2) MFLT-1/7.5FT Turbo T-BAK units

MILLER®
by Honeywell

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

New patent-pending Twin Turbo™ D-Ring connector easily adapts two lightweight TurboLite™ personal fall limiters (PFLs) for continuous 100% tie-off fall protection.

An Effective Solution When Working with Low Fall Clearance

Miller TurboLite™ Personal Fall Limiter and Twin Turbo™ Fall Protection System

Enabled Safety Product

*Miller TurboLite™ PFL

The cost-effective and competitive pricing of the new Miller TurboLite Personal Fall Limiters will make shock-absorbing lanyards obsolete on the jobsite. Workers will no longer need to "switch-out" equipment to maintain a safe fall distance.

MFL-1-Z7/6FT

2008 Plant Engineering PRODUCT of the YEAR Gold Award

- Extremely compact and lightweight provides 6 ft. working capacity; unit attaches directly to the harness back D-ring for greater mobility and versatility
- Engineered webbing for greater abrasion resistance and long service life
- High-strength, impact-resistant nylon housing for maximum durability
- Built-in swivel prevents lifeline from twisting
- Rated for up to a 400 lb. user
- No annual factory recertification required
- Meets global standards for international companies; meets all applicable OSHA, ANSI A10.32 and Z359-2007, and CSA standards

SKU	Description and Unit Connector	Lanyard End Connector
***Miller TurboLite™ PFL**		
MFL-1-Z7/6FT	TurboLite w/Steel Twist-Lock Carabiner	ANSI Z359 Compliant Locking Snap Hook
MFL-2-Z7/6FT	TurboLite w/Steel Twist-Lock Carabiner	ANSI Z359 Compliant Locking Rebar Hook
MFL-9-Z7/6FT	TurboLite w/ANSI Z359-2007 Compliant Locking Snap Hook	ANSI Z359 Compliant Locking Snap Hook
MFL-11/6FT	TurboLite w/Aluminum Twist-Lock Carabiner	Aluminum Locking Snap Hook
MFL-12/6FT	TurboLite w/Aluminum Twist-Lock Carabiner	Aluminum Locking Rebar Hook
Miller Twin Turbo™ Fall Protection System		
MFLB/	Twin Turbo D-Ring Connector	
MFLB-3-Z7/6FT	Twin Turbo D-Ring Connector & two (2) MFL-3/6FT TurboLite PFLs	Locking Snap Hooks
MFLB-4-Z7/6FT	Twin Turbo D-Ring Connector & two (2) MFL-4/6FT TurboLite PFLs	Locking Rebar Hooks
MFLB-11/6FT	Twin Turbo D-Ring Connector & two (2) MFL-11/6FT TurboLite PFLs w/o carabiners	Aluminum Locking Snap Hooks
MFLB-12/6FT	Twin Turbo D-Ring Connector & two (2) MFL-12/6FT TurboLite PFLs w/o carabiners	Aluminum Locking Rebar Hooks

MFLB-12/6FT

OH&S OCCUPATIONAL HEALTH & SAFETY NEW PRODUCT OF THE YEAR

MILLER by Honeywell

CONNECTING DEVICES

Small, lightweight cable lifeline

CFL-4-Z7/9FT

Miller Black Rhino™ Cable Self-Retracting Lifelines

- Lightweight, 9 ft. self-retracting lifeline
- Designed with stainless steel wire rope to endure the daily rigors of harsh environments
- Quick-activating, high-strength stainless steel braking system – arrests free falls, providing a quick, safe rescue
- Integral load indicator indicates when the unit must be removed from service and returned for repair
- Repairable; No annual factory recertification required

SKU	Unit Connector	Lanyard End Connector
CFL-2-Z7/9FT	Steel twist-lock carabiner	ANSI Z359 Compliant Locking, swivel snap hook with load indicator
CFL-4-Z7/9FT	Stainless steel swivel and steel twist-lock carabiner	ANSI Z359 Compliant Locking, swivel snap hook with load indicator
CFL-5-Z7/9FT	Stainless steel swivel and locking rebar hook	ANSI Z359 Compliant Locking, swivel snap hook with load indicator

An Affordable Alternative to Shock-Absorbing Lanyards

The lightweight, compact design of the 9 ft. Miller Scorpion™ Personal Fall Limiter requires less fall clearance, offers greater mobility and reduces tripping hazards. Meets all applicable OSHA, ANSI and CSA standards.

PFL-4-Z7/9FT

Miller Scorpion™ Personal Fall Limiters

- Lightweight and compact design; 9 ft. web lifeline
- Dual operation: Attach directly to harness back D-ring or use as traditional retractable lifeline
- Quick-activating, high-strength stainless steel braking system – arrests free falls, providing a quick, safe rescue
- No annual factory recertification required
- Visual load indicator indicates the unit must be removed from service

SKU	Unit Connector	Lanyard End Connector
PFL-2-Z7/9FT	Miller Scorpion w/steel twist-lock carabiner	ANSI Z359 Compliant Locking snap hook
PFL-4-Z7/9FT	Miller Scorpion w/carabiner and swivel shackle	ANSI Z359 Compliant Locking snap hook
PFL-6-Z7/9FT	Miller Scorpion w/rebar hook and swivel shackle	ANSI Z359 Compliant Locking snap hook
PFL-7-Z7/9FT	Scorpion w/locking snap hook and swivel shackle	ANSI Z359 Compliant Locking snap hook

MILLER®

by Honeywell

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES

Miller MiniLite® Fall Limiter

- Compact, 11 ft. retractable web lanyard with quick activating brake system limits free fall
- Corrosion-resistant, stainless steel interior components with high-impact thermoplastic housing
- Ideal for general plant maintenance, aerial or fork lifts, cherry pickers, bucket trucks, scaffold and steel erection
- Visual load indicator identifies when a unit has been involved in a fall
- Maximum work load 310 lbs.
- ANSI Z359 compliant

SKU	Unit Connector	Lanyard End Connector
FL11-0-Z7/11FT	N/A	Locking swivel snap hook
FL11-1-Z7/11FT	Steel twist-lock carabiner	Locking snap hook
FL11-3-Z7/11FT	Steel twist-lock carabiner & swivel shackle	Locking snap hook
FL11-6-Z7/11FT	Rebar hook & swivel shackle	Locking snap hook
FL11-8-Z7/11FT	Locking snap hook & swivel shackle	Locking snap hook

Miller Falcon™ Self-Retracting Lifelines

- High impact-resistant nylon housing withstands the harsh rigors of the toughest applications
- Corrosion-resistant stainless steel and aluminum internal components extend service life and reduce replacement costs
- Dual-swivels (unit top and snap hook) included on all cable models to minimize lifeline from twisting during use
- Unique side payout design reduces wear on the entry bushing and cable for smooth operation with less drag
- No annual factory recertification required, keeping units on the jobsite for increased productivity

SKU	Description	Length
MP16P-Z7/16FT	Miller Falcon 16 ft. web lifeline with stainless steel swivel and carabiner and ANSI Z359 locking snap hook	16 ft.
MP20P-Z7/20FT	Miller Falcon 20 ft. web lifeline with stainless steel swivel and carabiner and ANSI Z359 locking snap hook	20 ft.
MP20G-Z7/20FT	Miller Falcon 20 ft. galvanized wire rope with tagline and ANSI Z359 carabiner	20 ft.
MP30G-Z7/30FT	Miller Falcon 30 ft. galvanized wire rope with tagline and ANSI Z359 carabiner	30 ft.
MP50G-Z7/50FT	Miller Falcon 50 ft. galvanized wire rope with tagline and ANSI Z359 carabiner	50 ft.
MP65G-Z7/65FT	Miller Falcon 65 ft. galvanized wire rope with tagline and ANSI Z359 carabiner	65 ft.

Compact 11-ft. working capacity

FL11-1-Z7/11FT

Lifetime housing guarantee

MP20P-Z7/20FT

MP30G-Z7/30FT

MILLER® by Honeywell

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES

Extended service life

RL20P-Z7/20FT

RL65G-Z7/65FT

Miller MightyLite™ Self-Retracting Lifelines

- Corrosion-resistant stainless steel and aluminum components extend service life
- Double-swivel design prevents lifeline from twisting and kinking
- Narrow payout port prevents intrusion of dirt and debris
- No annual factory recertification required, keeping units on the jobsite for increased productivity
- Carabiner for attaching to anchorage and tagline, included

SKU	Description	Length
RL20P-Z7/20FT	1-in. polyester webbing; ANSI Z359 locking snap hook	20 ft.
RL50P-Z7/50FT	1-in. polyester webbing; ANSI Z359 locking snap hook	50 ft.
RL20G-Z7/20FT	3/16-in. Galvanized wire rope; ANSI Z359 carabiner	20 ft.
RLS30G-Z7/30FT	3/16-in. Galvanized wire rope; ANSI Z359 carabiner	30 ft.
RL50G-Z7/50FT	3/16-in. Galvanized wire rope; ANSI Z359 carabiner	50 ft.
RL65G-Z7/65FT	3/16-in. Galvanized cable; ANSI Z359 carabiner	65 ft.

8174/U

300L/50FTBL

Rope Grabs and Lifelines

Enabled Safety Product

SKU	Description
8174/U	Manual Rope Grab – Stainless steel, manual rope grab for use with 5/8-in. or 3/4-in. synthetic rope
300L/50FTBL	Polypropylene blend rope lifeline with locking snap hook and loop; 5/8-in. diameter; 50 ft.

ANCHORAGE CONNECTORS

8183/6FTGN

470/

Miller Cross-Arm Strap Anchorage Connector

- Designed to wrap around approved I-beams or other structures for a secure attachment point for lanyards and self-retracting lifelines
- 400 lbs. maximum capacity

Enabled Safety Product

SKU	Description
8183/6FTGN	6 ft. web Cross-Arm Strap wraps around I-beams and other structures and attaches with a 2-in. D-ring that slips through a 3-in. D-ring

Miller Wire Hook Anchor

- Stainless steel wire hook is fast and easy to use
- 400 lbs. maximum capacity

SKU	Description
470/	Connects to various approved anchorages including railings, small I-beams, angle iron and scaffolding. Squeeze the spring-loaded hook and slip the large opening over the approved structure

MILLER®

by Honeywell

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

Miller Fusion™ Roof Anchor Post

- Permanent or temporary solution for roof safety
- Versatile single-point anchor adapts to a wide range of roof designs
- Protects worker by maintaining a secure connection to the structure; Protects the structure with a unique energy-absorbing load distribution system

SKU	Description	Designed to Accommodate
X10000	Standing Seam Roofing	Standing seam spacing from 11.75-in. to 17-in.
X10001	Standing Seam Roofing	Standing seam spacing from 11.75-in. to 21.25-in.
X10002	Standing Seam Roofing	Standing seam spacing from 11.75-in. to 24-in.
X10010	Metal Sheathing Roofing	Metal sheathing w/minimum thickness of 24 gauge (0.024-in.)
X10011	Metal Sheathing Roofing	Metal sheathing w/minimum thickness of 24 gauge (0.024-in.). Trapezoidal spacing of 8-in. to 20-in. in one-inch increments
X10030	Membrane/Built-up Roofing	Fastens through membrane, insulation & into metal sheathing, wood sheathing or concrete with a combined thickness of up to 5.5-in.
X10031	Membrane/Built-up Roofing	Fastens through membrane, insulation & into metal sheathing, wood sheathing or concrete with a combined thickness of > 5.5-in. up to 10.5-in.
X10020	Multi-Purpose Metal Sheathing, Wood and Concrete Roofing (no hardware included)	With Miller approved hardware, accommodates: metal sheathing w/minimum thickness of 24 gauge (0.024 in.). Trapezoidal spacing of 8-in. to 20-in. in one-inch increments. Plywood with minimum thickness 5/8-in. CDX. Concrete decking with minimum thickness of 6.5-in. & minimum concrete compressive strength of 3000 PSI (20.7 MPa)

Note: Additional models available for wood sheathing, concrete roofing and multi-purpose applications

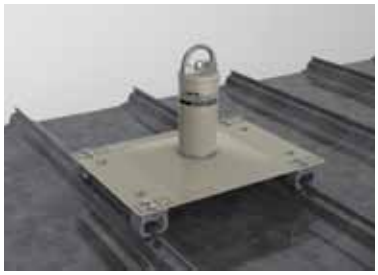

Standing Seam

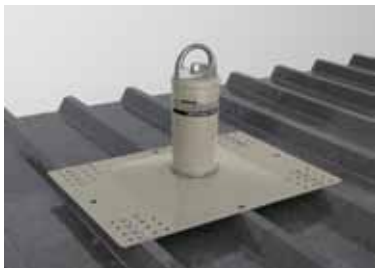

Metal Sheathing

Membrane

Temporary Anchors

SKU	Description
17D-1/	Steel twist-lock carabiner; 1-in. gate opening. Meets ANSI Z359
18D-1/	Large, steel twist-lock carabiner; 2-in. gate opening. Meets ANSI Z359
18D-2/	Large, aluminum twist-lock carabiner; 2-1/4-in. gate opening
RA30-1	Reusable chain with 'O' ring; steep-pitched or flat roof
9065	Lightweight beam trolley adjusts to fit beam flanges from 3-in. to 4-1/2-in. wide. The adjustable trolley slides along with the worker to provide maximum mobility
496/	Miller Grip™ portable/reusable anchorage supports 5,000 lb. ultimate strength; for single user connection; 400 lbs. maximum capacity; color-coded green. Hole diameter – 3/4-in.
8816-14/	Lightweight, adjustable ShadowLite™ Beam Anchor – high-strength aluminum and bronze; 4.2 lbs.

17D-1

496/

8816-14

RA30-1

9065

ANCHORAGE CONNECTORS

RA40/

RA41/



RA45/

416/

Permanent Roof Anchors

SKU	Description
RA40/	Double D™ permanent roof anchor is designed to provide two (2) D-ring anchorage points when securely installed on a wood roof sub-surface ridge peak; Complete with 8, 16d nails
RA41/	Single D™ permanent roof anchor is designed to provide one (1) D-ring anchorage point when securely installed on a wood roof sub-surface ridge peak or vertical wall; Complete with 8, 16d nails
RA45/	The Claw™ permanent roof anchor is designed to provide a single anchorage point when securely installed on a wood rafter or truss member; Fits wood sizes 2-in. x 4-in., 2-in. x 6-in., 2-in. x 8-in., 2-in. x 10-in. or 2-in. x 12-in.
416/	D-Bolt Anchor for up to 4-in. working thickness includes a 5/8-in. diameter bolt with lock washer and nut

HORIZONTAL LIFELINE SYSTEM

Accommodates two workers

Miller TechLine™ Temporary Horizontal Lifeline System Kit

- Low-stretch rope lifeline for better performance/less deflection
- Lightweight kit; easy to carry
- Quick and easy to install for increased productivity
- Cross-arm anchorage straps for easy installation
- Connecting O-rings for greater mobility
- Shock absorber pack reduces fall arrest forces
- Designed so anchorage points only need to be rated for 5,000 lbs. (22 kN)
- Rope lifeline adjuster to accommodate required length
- Meets applicable OSHA, ANSI and CSA requirements
- Waterproof bucket for safe storage

SKU	Description
HLLR2/60FT	60 ft. Rope Temporary HLL System for two workers

MILLER®

by Honeywell

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

HORIZONTAL LIFELINE SYSTEM

SkyGrip® Horizontal Lifeline systems are designed for easy installation on steel or concrete applications. A variety of innovative features have been engineered into these new systems, making them extremely user friendly with enhanced safety considerations. Maximize worker safety/productivity and minimize liability!

A New Dimension in Horizontal Lifeline Fall Arrest Technology

Miller SkyGrip™ Temporary Horizontal Lifeline System

- Systems available for steel and concrete applications
- Interchangeable stanchion posts enable systems for steel applications to be converted to concrete applications and systems for concrete applications to be converted for steel applications
- Above the beam quick installation for increased safety
- Stainless steel energy absorber minimizes fall clearance
- Tension indicator ensures proper tensioning critical to knowing fall clearance
- Continuous pass-through design
- Lightweight and compact

SKU	Description
Systems for Steel Applications – Accommodates flanges 4 to 18 in. wide and up to 2-1/4 in thick	
SGS18/60FT	60 ft single-span system accommodates up to 2 workers
SGS18/120FT	120 ft multi-span system accommodates up to 4 workers
Systems for Concrete Applications – Attaches to rebar, concrete inserts or expansion bolt anchors	
SGC/60FT	60 ft single-span system accommodates up to 2 workers
SGC/120FT	120 ft multi-span system accommodates up to 4 workers
Lifeline Kits	
SG416/60FT	60 ft Kit w/two 416 D-bolt anchors, accommodates up to 2 workers
SG8183-10/60FT	60 ft Kit w/two 10 ft 8183 cross arm straps, accommodates up to 2 workers
SG8815-12/60FT	60 ft Kit w/two 8815-12 fixed beam anchors, accommodates up to 2 workers
System Components	
SGXK	Energy absorber kit includes energy absorber, tension indicator and 2 anchor shackles
Convert systems for concrete applications for use in steel applications	
SGSB18	Base to convert stanchions for concrete applications for use in steel applications (1 SGSB18 required for each stanchion)
Convert systems for steel applications for use in concrete applications	
SGCB	Base to convert stanchions for steel applications for use in concrete applications (1 SGCB required for each stanchion)
SGCA	Kit to convert system for steel applications for use in concrete applications (1 SGCA required for each system)

Note: Longer systems available that will accommodate up to six workers

Maximum gripping power

SGS18/60FT

SGC/60FT

MILLER® by Honeywell

Call Customer Care at 800 430-5490.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

COLLECTIVE SAFETY AT HEIGHT SYSTEMS

EPIC ULTRA Barrier System

EPIC Basic Barrier System

Miller EPIC™ Barrier Systems

Most commonly used in building construction and other elevated areas where workers are exposed to leading edges, the Miller EPIC Barrier Systems provide durable, reusable safety solutions for multiple workers. Engineered for quick and easy installation to reduce labor costs, the barriers are available in four (4) cost-effective safety systems.

- EPIC ULTRA Barrier System
- EPIC POST-N-Barrier System
- EPIC Basic Barrier System
- EPIC Stair Barrier System

SKU	Description
M3203	EPIC ULTRA Barrier – Tightly engineered steel mesh design; height adjustable. Maximum post spacing 8 ft.
M1290	EPIC Multi-Foot Base – Used for horizontal surface applications, most commonly at the slab edge or for stair applications. The three points of support allow accurate installation on an uneven surface and ensure that the anchor load is correctly controlled. The Multi-Foot Base can be through-fitted using a variety of anchors appropriate to the base material. Hole size diameter 0.71-in. for fastening base
M1140	EPIC Adjustable Safety Post – Galvanized steel construction and designed with the Quiclox auto-locking mechanism to secure the post into the base making installation and dismantling quick and easy. Length 59.06-in.

CONFINED SPACE & RESCUE/DESCENT

DH-1/

Miller DuraHoist™ Safety Systems

Designed for manhole and confined space entry/retrieval and fall arrest applications. The modular design allows the use of components in various configurations and applications. Multiple winches and/or lifeline systems may be mounted as required. Lightweight, manageable components for easy storage, transport and set-up.

SKU	Description
DuraHoist™ Portable Confined Space System	
DH-1/	Four-piece system with ManHandler hoist/winch w/65-ft. of 3/16-in. galvanized steel cable
DH-2/	Four-piece system without ManHandler hoist/winch
DuraHoist™ Portable Fall Arrest Posts	
DH-AP-1/	Portable Fall Arrest Post
DH-AP-3/	Rescue/Material Handling Davit Arm
DH-AP-9/	Portable I-beam anchor base
Miller Winch and Hoist Mounting Brackets	
8442-Z7/65FT	ANSI Z359 compliant ManHandler® personnel-rated hoist w/65 ft. of 3/16-in. galvanized steel cable
MR50GB-Z7/50FT	ANSI Z359 compliant MightEvac® SRL w/50 ft. of 3/16-in. galvanized wire rope, mounting bracket & carabiner
DH-19-MILLER/	Complete mounting bracket assembly required to mount a Miller ManHandler Hoist/Winch or a Miller MightEvac SRL

CONFINED SPACE & RESCUE/DESCENT

Miller Tripod w/MightEvac® Self-Retracting Lifeline/ Emergency Retrieval Hoist

- Promotes quick and easy rescue with a 4:1 mechanical advantage (avg. speed of 25 ft. per minute)
- 7 ft. tripod; lightweight, high-strength aluminum construction; adjustable legs; safety chain; rubber skid pads/serrated edge tripod feet
- Corrosion-resistant stainless steel/aluminum components
- 310 lb. capacity; no annual factory recertification

SKU	Description
MR50GC-Z7/50FT	MightEvac w/50 ft. of 3/16-in. galvanized wire rope; 7 ft. tripod; mounting bracket, pulley, carabiner and two heavy-duty equipment bags

MR50GC-Z7/50FT

Miller SafEscape® ELITE Controlled Descent/ Self-Rescue System

- Used for vertical and angular controlled descent from overhead cranes, towers, aerial lifts, oil derricks, platforms and other elevated work areas; approved for multiple descents
- Includes lifeline (specify length); rescue harness; cross arm strap anchorage connector / carabiner; retrieval yoke; and carrying bag

SKU	Description
SE/75FT	Miller SafEscape ELITE RDD; also includes anchor slings and rescue bag; 75 ft.
SEHW/75FT	Miller SafEscape ELITE RDD w/Hoisting Wheel; also includes anchor slings and rescue bag; 75 ft.

SEHW/75FT

CLIMBING AND FALL RESTRAINT

GlideLoc® Vertical Height Access Ladder System Kits

GlideLoc Ladder Systems provide an innovative solution for vertical climbing that is easy-to-use, requires minimal maintenance and provides superior safety. The easy-climb GlideLoc Systems offer hands-free safety at height that ultimately increases worker mobility, safety and productivity.

- Unique design keeps hands free for climbing
- Engineered for smooth operation for ascending/descending
- Durable construction for extended service life
- Accommodates multiple workers

Kits are available in aluminum, galvanized or stainless steel construction and come complete with GlideLoc rail, gated top end-stop, gated bottom end-stop, ladder attachment brackets, and hardware

SKU	Description
GG0030	30 ft. GlideLoc system; requires 2 sections of 10 ft rail and 4 rung clamps
GG0050	50 ft. GlideLoc system; requires 5 sections of 10 ft rail and 9 rung clamps
22697/	Comfort GlideLoc Fall Arrester – Locks into the rail in the event of a fall Stainless steel and aluminum construction
25805/	Universal II GlideLoc Fall Arrester – Can be removed from the rail anywhere along the system enabling transfer onto platforms Stainless steel and aluminum construction

GG0050