

Spider Dual Monorail System

Spider's Dual Monorail System is a complete solution for challenging curtain wall applications, providing continuous, horizontal mobility for swingstages and material hoists around a structure's perimeter.

Fully integrated suspended access manufacturing and engineering

Highly specialized design and support expertise

Custom engineered solutions that benefit from complex local safety code expertise

Certified Quality Systems

Investment in operational excellence to drive reliability and consistency across the Americas

24/7 technical support




SPIDER DUAL MONORAIL SYSTEM

With nearly seven decades of knowledge and experience

in putting people to work at height safely and productively, Spider now offers a complete, innovative monorail solution for your most challenging curtain wall projects.

- Easy to assemble with rotating, pinned connections between each monorail beam and outriggers
- Configurable for a single or double monorail
- Precise horizontal and vertical positioning of large, delicate curtain wall panels while simultaneously providing access for workers on a swingstage
- NEW universal 6 in. x 8 in. I-beams support up to 3,000 lbs and are used for both the monorail and outrigger support, eliminating the need for special parts
- Improved productivity with a continuous track that enables seamless transportation and repositioning
- Maximized uptime with rapid delivery, service, and repair from 24 branches in the Americas

Global presence with 24 rental and sales locations in the Americas

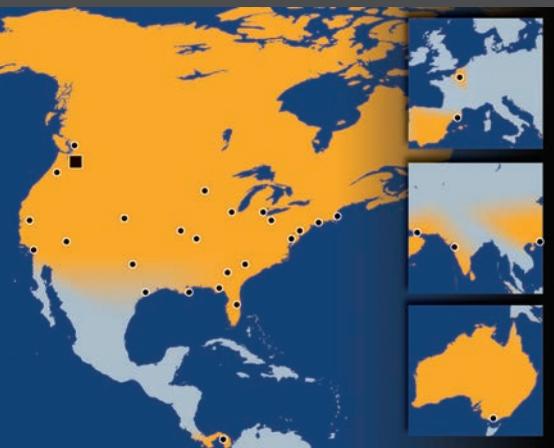



Spider's Dual Monorail System provides a complete access solution for your most challenging curtain wall application.

Position large, delicate panels safely, precisely, and efficiently along the entire building façade with our innovative monorail system.

SPIDER DUAL MONORAIL SYSTEM

One high-capacity, flexible outrigger beam system with NEW 6 in. x 8 in. I-beams, simple bolted splice plates, and rotatable pinned connectors and support beams to accommodate rooftop obstructions

Engineered corner sections enable traversing from one building elevation to another.

A straight monorail can be configured to cantilever 7 ft past the last outrigger, providing access to hard-to-reach areas.

Customize your system with Spider modular platforms and Beta Max material hoists.

Complies with OSHA 1926.451 and engineered per customer application



We listen to our customers and continually develop new products with improved features based on your requests.

