



Ladder Frame-Slide Lock
Main Tube: $\phi 1.69" \times 0.095"$

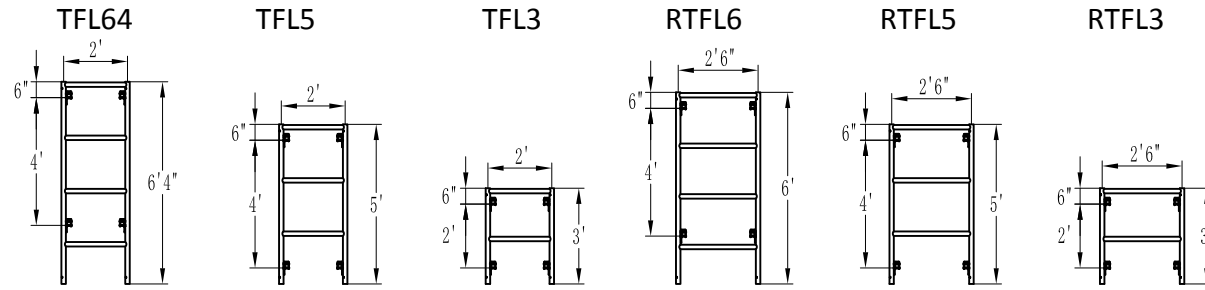

Ladder Frame Spec.	2' x 6' 4"	2' x 5'	2' x 3'	2' 6" x 6'	2' 6" x 5'	2' 6" x 3'
Weight Of Frame (lb)	35.98	29.17	20.33	38.40	31.61	21.98
Max. Allowed Leg Load At 4:1 Safety Factor (lb)	3132	4043	5494	3001	3283	4831
Max. Allowed Uniform Load At 4:1 Safety Factor (lb)	2080	1837	1835	2123	1440	1600

Walk Thru Frame-Slide Lock
Main Tube: $\phi 1.69" \times 0.095"$

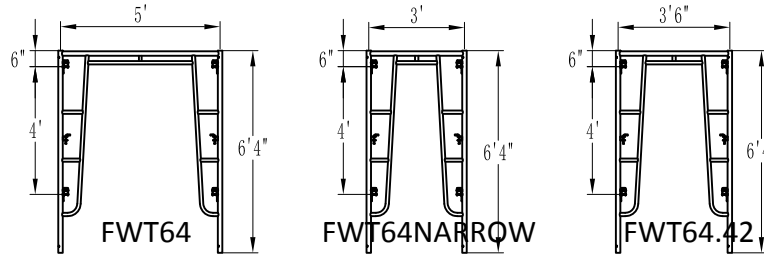


Notes: 1, Max. allowable leg loads are based upon tests one frame high with bottom screw jack extended 12 inches.
2, Max. allowable uniform loads are limited to frame top ledger only.
3, Total weight (both dead and live) must not exceed these Max. allowable loads.

Walk Thru Frame Spec.	5' x 6' 4"	3' x 6' 4"	3' 6" x 6' 4"
Weight Of Frame (lb)	49.82	44.03	45.15
Max. Allowed Leg Load At 4:1 Safety Factor (lb)	3236	2749	3270
Max. Allowed Uniform Load At 4:1 Safety Factor (lb)	2029	3025	2674

This data sheet is intended for general information only.
Because of the many variables which affect the performance of this product line, some of the information may not apply.

Mason Frame-Slide Lock
Main Tube: $\phi 1.69" \times 0.095"$

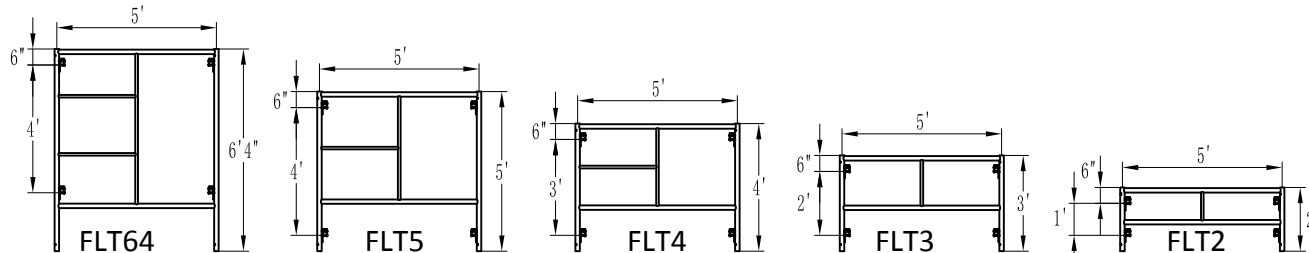

Mason Frame Spec.	5' x 6' 4"	5' x 5'	5' x 4'	5' x 3'	5' x 2'
Weight Of Frame (lb)	49.96	39.40	36.04	30.51	27.40
Max. Allowed Leg Load At 4:1 Safety Factor (lb)	2645	3139	4189	4512	5170
Max. Allowed Uniform Load At 4:1 Safety Factor (lb)	1629	1560	1556	1521	1632